


HIGH SPEED USB - RS422/485 CONVERTER

URI-10




- Serial transfer rates up to 3 Mbit or 5 Mbit
- LED Display for signal status and power
- Low capacitance, single directional high speed protection against ; short circuit, power loss, induction and power surge like lightning

URI-10 High Speed converter has been designed to meet secure data logging, simulation, test and integration verification purposes on the systems using RS-422/485 communication protocols.




URI-10

High Speed USB - RS422/485 Converter

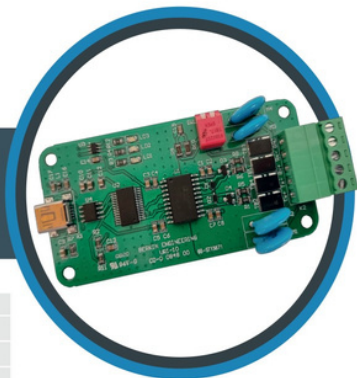

Baud Rate	3 Mbit - 5 Mbit
Isolation Protection	± 15 kV
Overcurrent protection	Yes
Connector	5X1 - USB-MINI-B
Serial Connections	RS-422/485 - USB (Mini)(2.0/3.0)
RS-422/485	Tx+, Tx-, Rx+, Rx-, GND
USB	USB 2.0 mini, USB 3.0 mini
Size	92x40x15 mm

Model Number	URI-10
Stock Code	7025-DA-029-8615



USB-RS422/485 Converter Block Diagram

